



UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

STAINLESS STEEL BALL FLOAT VALVE SCREWED END

Technical Data



Application :

Water, Sea water


Working pressure : 10 bar

Testing pressure : 15 bar

Screw standard of R1 & Rp is according to BS21

Material

No.	PART	MATERIAL
1	BODY	SS 304
2	CYLINDER	SS 304
3	PISTON	SS 304
4	SPINDLE	SS 304
5	STRAINER	SS 304
6	WASHER	SS 304
7	SEAT RING	RUBBER
8	DISC GUIDE	SS 304
9	LEVERAGE	SS 304
10	BALL FLOAT	SS 304
11	LEVER	SS 304
12	O-RING	RUBBER
13	O-RING	RUBBER
14	PISTON RING	RUBBER
15	O-RING	RUBBER
16	PISTON	SS 304
17	CAP	SS 304

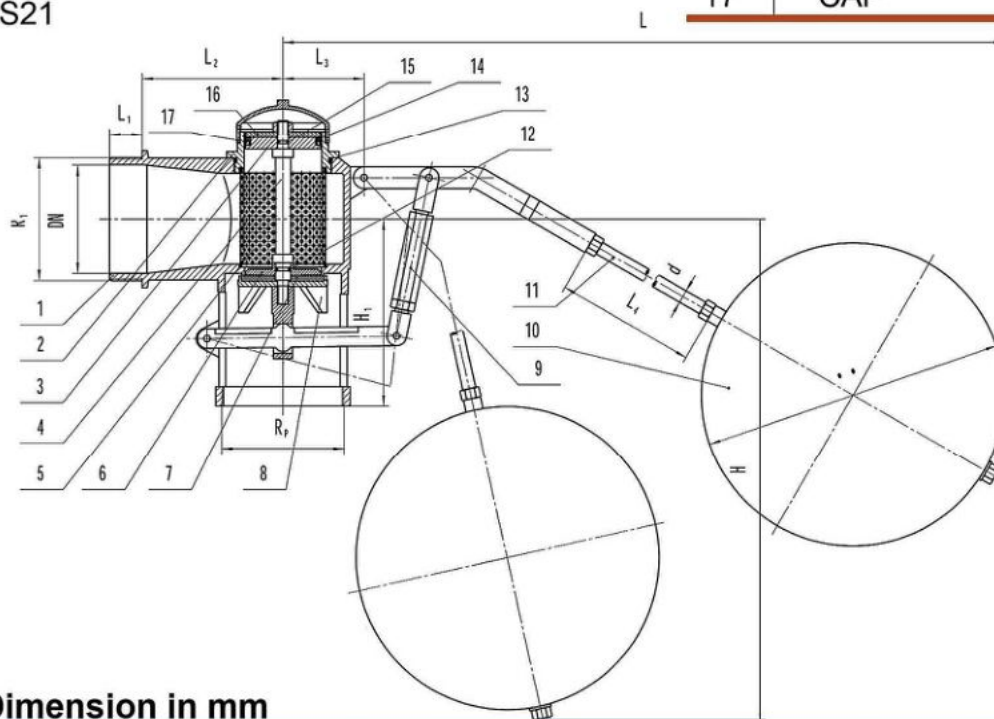

Dimension in mm

SIZES		L	L1	L2	L3	L4	d	H	H1	WT. (KG)
DN	in.									
65	2.1/2	705	28	90.5	52.5	560	8	640	120	4.6
75	3	1015	28	99	61.5	560	10	855	137	6.4
100	4	1040	30	130	75	560	10	970	172	11.6

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.