




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

## LUG SLIM-DISC BUTTERFLY VALVE ANSI FLANGED

ARSBFL3-xxx  
ARSBFG3-xxx  
ARSBFL4-xxx  
ARSBFG4-xxx

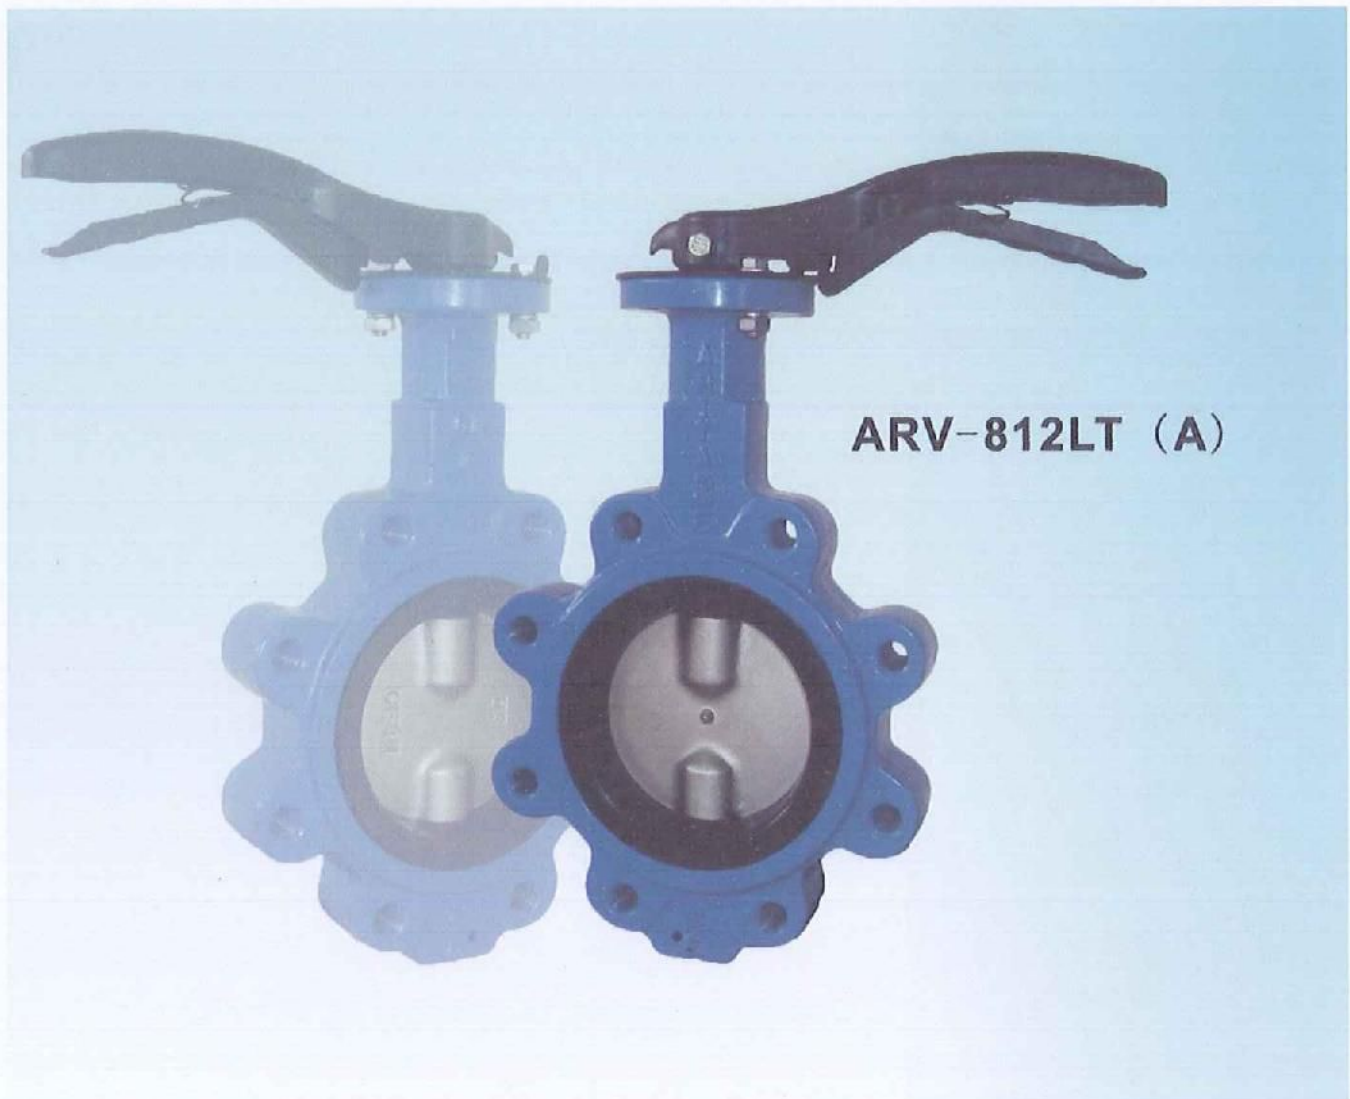

**ARV-812LT (A)**

The new body design offers esthetic appearance, strength and compatible flange connection to international standards. Its top flange is designed to ISO 5211 for the direct mounting of gear operator or actuators which eliminate the cost of mounting bracket. The lug style design allows the valve to be installed between two flanges by using a separate set of bolts on each side of flange. The body is epoxy coated for better resistant against abrasion and corrosion. Arita offers various materials for the valves seat and disc to meet the various requirements of customers. The fine finishing of seat surfaces and the polished edge of disc give good sealing and reduction in operating torque. The upper and lower shafts are well supported and properly sealed to prevent leakage. This pinless design has eliminated the potential of leak through pin hole.

