



UNIMECH GROUP, MALAYSIA


CAST IRON BALL FLOAT VALVE WITH ROD JIS10K FLANGED END



Technical Data

Material

No.	PART	MATERIAL
1	YOKE	FC 20
2	LEVER	SUS 304
3	PIN	SUS 304
4	JOINT	SUS 304
5	NUT	SUS 304
6	ROD	SUS 304
7	GLAND	BS 6
8	PACKING	TEFLON
9	BALL	SUS 304
10	YOKE LOCK	FC 20
11	BOLT	STEEL
12	COVER	FC 20
13	GLAND	SUS 304
14	PISTON	SUS 304
15	PLUG STEM	SUS 304
16	SEAT PACKING	NBR
17	SEAT	SUS 304
18	BODY	FC 20
19	COVER	FC 20
20	BOLT	STEEL

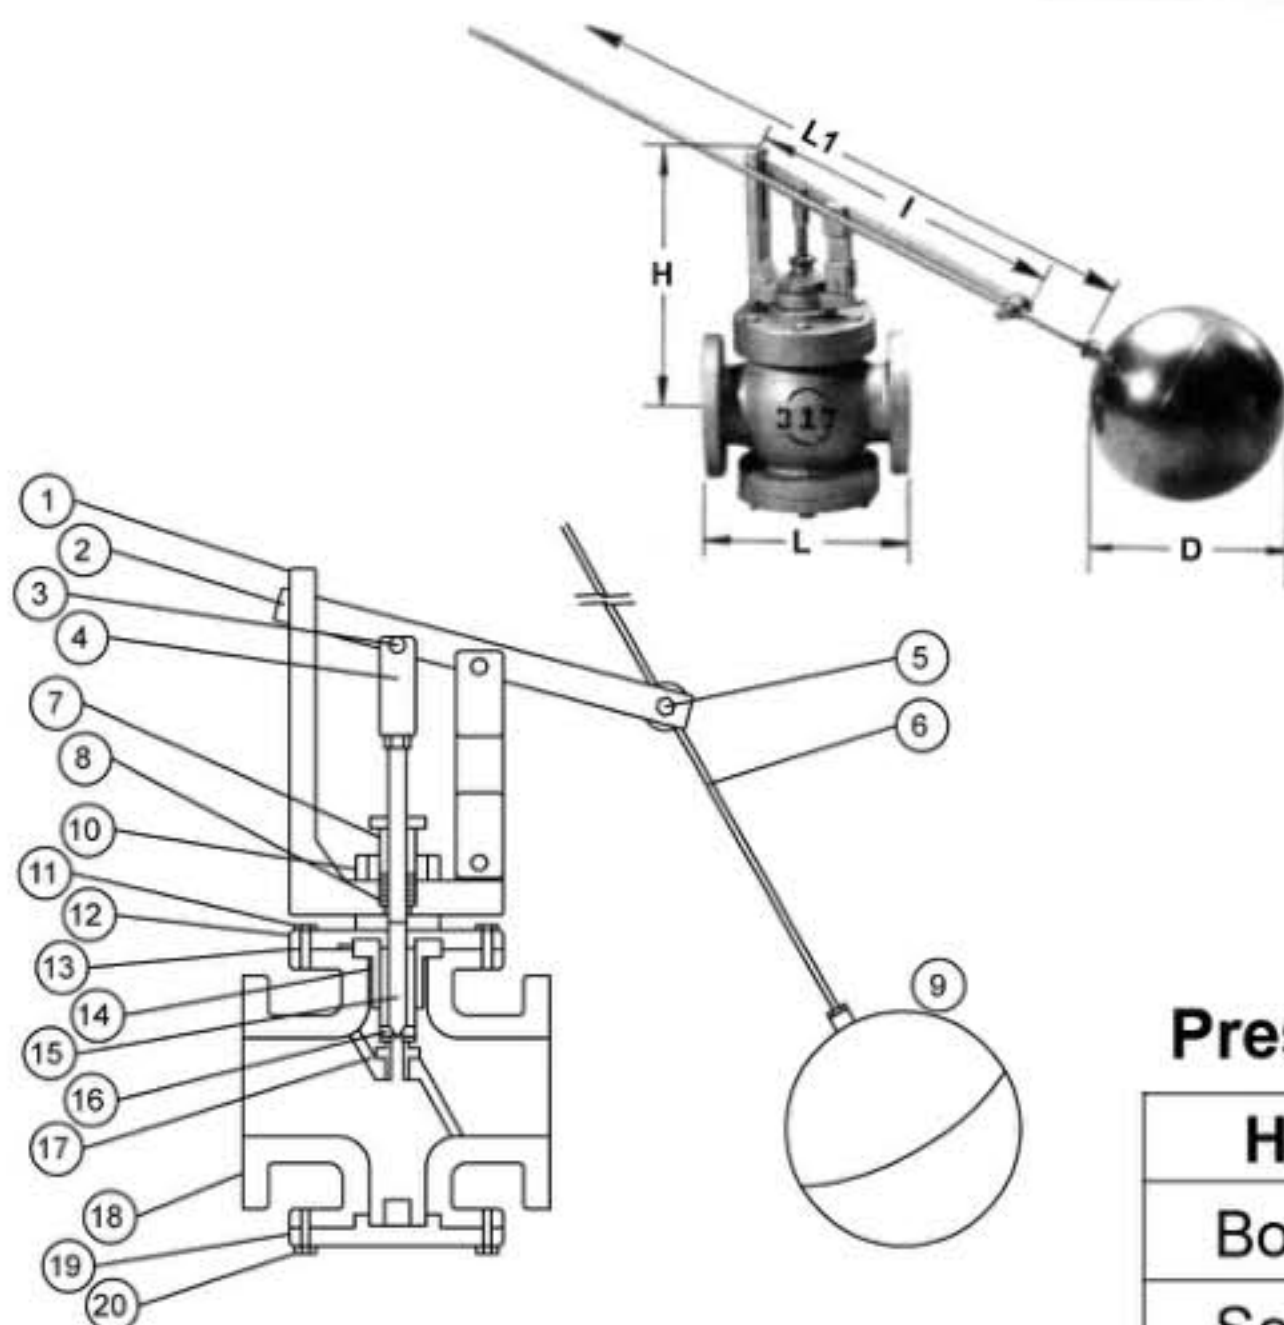

Pressure Test

Hydrostatic Test	
Body	10 kg/cm ²
Seat	7 kg/cm ²

Working Pressure

Water	0.5 ~ 10 kg/cm ²
-------	-----------------------------

Dimension in mm

SIZES	inch DN	1.1/2"	2"	2.1/2"	3"	4"	5"	6"	8"
L	End to End	200	215	230	250	280	308	380	440
H	Height	290	295	315	317	340	340	370	390
I	Lever	400	400	400	400	400	400	400	400
D	Ball Dia. (inch)	8	8	10	10	10	10	10	10
L1	Float Arm	600	600	1000	1000	1000	1000	1000	1000

Flanged End Acc. To JIS 10K Specification.