
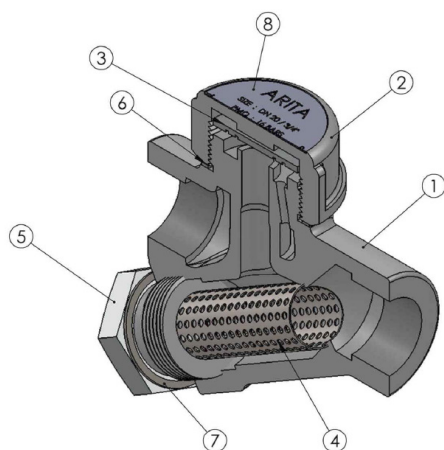


ARITA DUCTILE IRON THERMODYNAMIC STEAM TRAP

16K THERMODYNAMIC STEAM TRAP

ARV-715SE

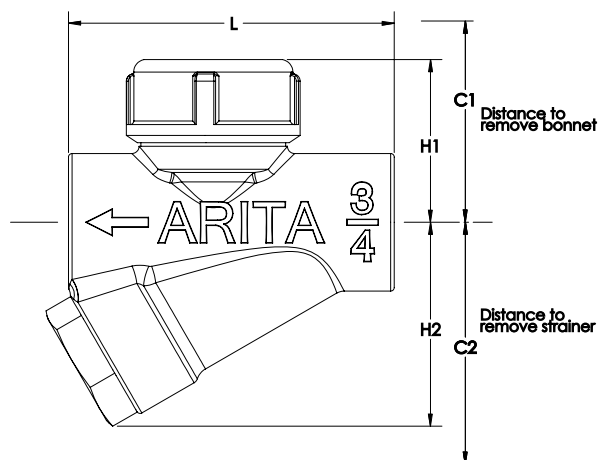

SPECIFICATIONS

- Screwed end : BSPT or NPT
- Production and performance characteristic tests for automatic steam traps : BS EN 26948:1981 / ISO 6948:1981
- Marking of automatic steam traps : BS EN 26553:1991 / ISO 6553:1980
- Testing Standard : BS EN 26948:1991

WORKING PRESSURE

Nominal working pressure	:	16 Bars
Pressure at maximum temperature, 220 °C	:	24 Bars

TEST PRESSURE

Hydrostatic Shell Test Pressure	:	24 Bars
Hydrostatic Air Test Pressure	:	6 Bars

STANDARD COMPONENT MATERIAL

NO	DESCRIPTION	QTY.	MATERIAL
1	Body	1	Ductile Iron
2	Bonnet	1	Ductile Iron
3	Disc	1	SUS 304
4	Strainer	1	SUS 304
5	Cap	1	Ductile Iron
6	Gasket-Bonnet	1	PTFE
7	Gasket-Cap	1	PTFE
8	Name Plate	1	Aluminium

DIMENSION TABLE (MM)

Size		L	H1	H2	C1	C2	Weight (Kg)
DN	Inch						
15	1/2	90	43	57	60	70	0.90
20	3/4	90	45	57	60	75	0.96
25	1	90	48	61	65	80	1.12