
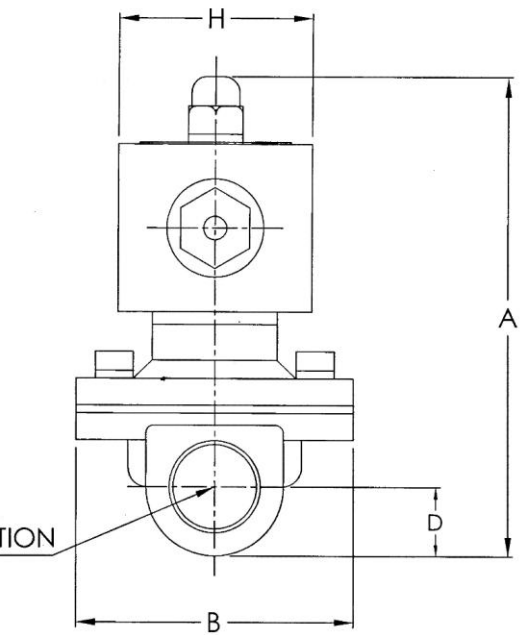
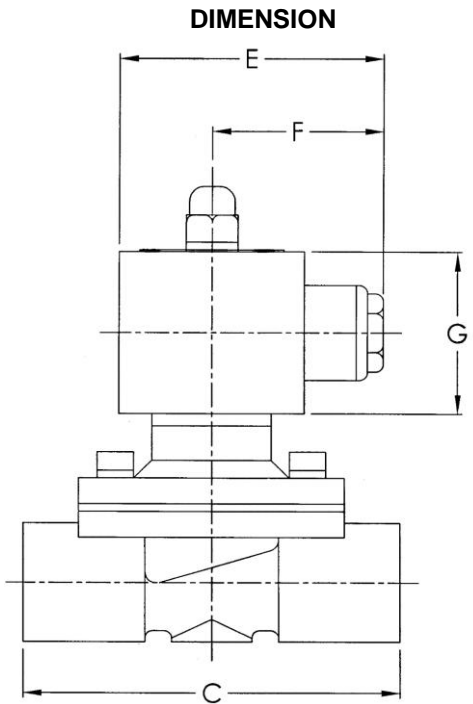


Forced Lifting Type, 2/2 Way, General Service, Normally Closed



Application:

Air, water, gas, light oil, vacuum, etc.

Specification:

- Body : Brass
- Sealing : NBR
- Pressure (M.O.P.D) : 0~ 5bar (water, liquid)
0~ 7bar (air, gas)
- Enclose : Lead wire, Din Type Coil (option)
- Fluid temperature : 5 ~ 80 degree C°
- Ambient temperature : 50 degree C°
- Voltage : AC110, 240V 50Hz
: DC 24V
- Tolerance : +/- 10% (AC), +/-5% (DC)

Feature:

- a) Can be installed in any position but the level condition to keep coil upside best for long life.
- b) Small volume, high flow, little electric power required.
- c) Coil is design to turn in free direction.

Unsuitable Fluid:

- a) Viscosity over 50 CST.
- b) Liquid when be heating, solid when cool.
- c) Do not use at corrosive fluid.

Caution:

- a) Please clean up the inside of pipes before fitted.
- b) A strainer or filter has to be installed one meter away from the solenoid valve.

MODEL	CONNECTION	CV VALUE	ORIFICE (MM)	DIMENSION							
				A	B	C	D	E	F	G	H
AW-15	1/2"	4.8	16	113.0	57.5	68.0	13.2	71.3	46.5	42.5	50.0
AW-20	3/4"	7.6	20	119.5	57.5	71.5	17.5	72.0	46.5	43.0	50.0
AW-25	1"	12	25	129.0	77.5	97.0	20.5	71.5	48.5	43.5	50.0
AW-32	1 1/4"	24	35	166.0	96.0	116.5	27.5	91.5	56.5	64.7	70.0
AW-40	1 1/2"	29	40	168.5	96.0	116.5	29.5	91.5	56.5	64.7	70.0
AW-50	2"	48	50	192.0	126.0	160.5	38.5	91.5	56.5	64.7	70.0

**Note: All technical specification are without obligation!