


PU Series Solenoid Valve, Forced Lifting Type, 2/2 Way, General Service, Normally Closed



Application:

Air, water, gas, light oil, vacuum, etc.

Specification:

Body	: Brass
Sealing	: NBR
Pressure (M.O.P.D)	: 0 ~ 7bar (air, water, oil)
Max. Pressure	: 10.5 bar
Enclose	: DIN coil IP65
Medium temperature	: -5 ~ 80°C
Ambient temperature	: 50°C
Voltage	: AC110, 240V, 50Hz : DC 24V
Tolerance	: +/- 10% (AC), +/-5% (DC)

Features:

- a) Compact and good appearance
- b) Direct acting, diaphragm structure, can work at zero pressure
- c) Coil made from H class wire, thermosetting plastic encapsulating, reach IP65 protection class with plug


Unsuitable Fluid:

- a) Viscosity over 50 CST.
- b) Liquid when be heating, solid when cool.
- c) Do not use at corrosive fluid.

Caution:

- a) Please clean up the inside of pipes before fitted.
- a) A strainer or filter has to be installed one meter away from the solenoid valve.

DIMENSION

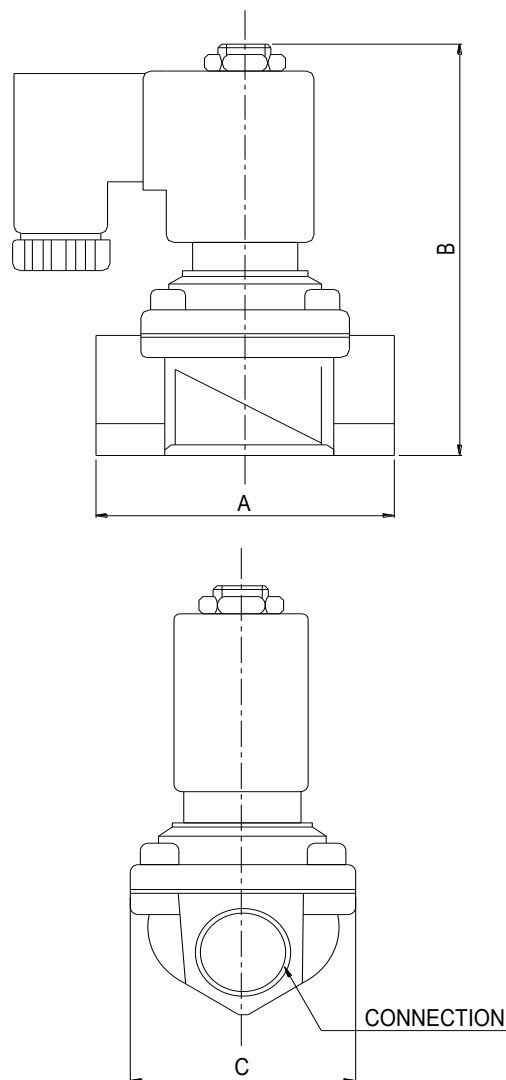

MODEL	CONNECTION	CV VALUE	ORIFICE (MM)	DIMENSION		
				A	B	C
PU-220-02AR	1/4"	0.18	2.3	30.0	62.0	22.0
PU-220-03AR	3/8"	1.00	8.0	55.0	79.5	30.0
PU-220-04A	1/2"	4.00	13	65.5	101.0	48.0
PU-220-06A	3/4"	8.60	20	71.0	107.0	58.0
PU-220-08A	1"	11.00	25	96.0	121.0	70.0

* Data subject to alteration