





SB116-5 Series Solenoid Valve, Forced Lifting Type, 2/2 way, Normally Closed

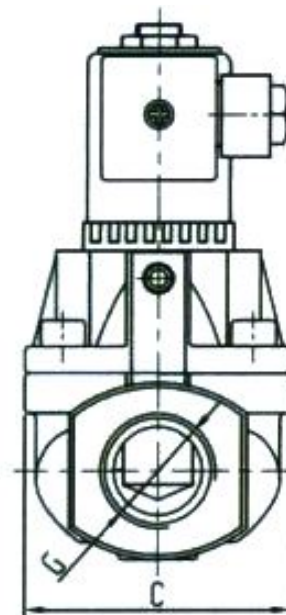

DIMENSION

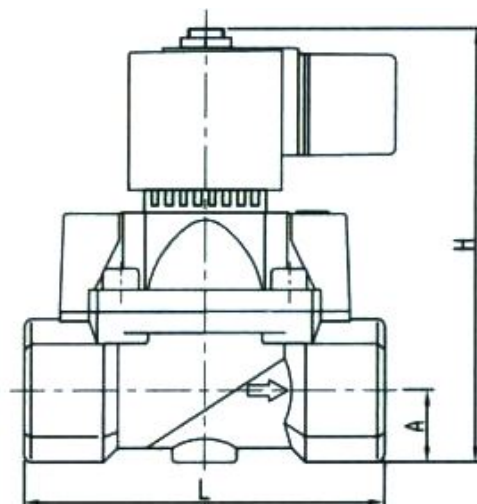

Specification:

Body	: Brass
Sealing	: PTFE
Pressure (M.O.P.D)	: 0.1 ~ 4.0 MPa
Enclose	: DIN coil IP65
Ambient temperature	: -20 ~ + 55°C
Medium temperature	: 0 ~ + 90°C
Voltage	: 240V, 50Hz, 20 VA : DC 24V, 13W
Tolerance	: +/- 10% (AC), +/-5% (DC)

Speciality :

- * It can be used in gas, water, oil weak acid & alkaline.
- * Low noise, no-water hammer impact, low noise, stable working, large flow, long service life.
- * Coil model: BD-A-3
- * The coil made from thermosetting plastic encapsulating, the protection class IP65. Plug confirms with ISO standard.

Unit : mm

MODEL	CONNECTION (g)	ORIFICE (MM)	DIMENSION			
			K	L	B	A
SB116-51315	G1/2"	13	33.5	72	85	13
SB116-52520	G3/4"	25	60	100	120	20
SB116-52525	G1"	25	60	100	120	20

* Data subject to alteration