



UNIMECH INSTRUMENTS & CONTROL SDN. BHD.

(641861-M)



UNIMECH INSTRUMENTS & CONTROL SDN. BHD. (641861-M)

Add : 50 Lengkok Kapal, Taman Industry Chain Ferry,
12100 Butterworth, Penang, Malaysia.

Tel : +604 – 3248788, 3330393

Fax : +604 – 3249787

Email : sales@myuic.com.my

Website : www.myuic.com.my

UQT Electric Actuator



PRODUCT SUMMARY

"UQT" series electric actuator is used for controlling 0° ~ 270° rotation of the valves and other similar products, such as butterfly valve, ball valve, damper, flapper valve, cock valve etc. It widely applies to petroleum, chemical, water treatment, shipping, paper making, power plant, heating, light industry and other industries. Driven by 380V/200V/110VAC power or 24V/110VDC power, input 4-20mA or 0-10DC control signal, moves valve to the right position, and achieves to automatic control, maximum output torque is 5000N.M.

PERFORMANCE PARAMETER

Model	Max Output Torque	Operating Time 60/50Hz	Max Drive Shaft Size	F-class Motor	Rated Current (A)				Handwheel Revolution	Weight
					Single Phase		Three Phases			
	N·M	90° (S)	mm	W	110V	220V	380V	440V	N	(kg)
UQT-005	50	18/22	φ20	20	1.10/0.95	0.55/0.54	0.3/0.3	N/A	10	7.5
UQT-008	80	18/22	φ20	20	1.10/0.95	0.55/0.54	0.3/0.3	N/A	10	7.5
UQT-010	100	18/22	φ20	20	1.10/0.95	0.55/0.54	0.3/0.3	N/A	10	7.5
UQT-015	150	21/25	φ22	40	1.65/1.67	0.88/0.84	0.31/0.31	0.30/0.31	11	17.3
UQT-020	200	21/25	φ22	40	1.67/1.67	0.89/0.85	0.31/0.31	0.30/0.31	11	17.3
UQT-030	300	26/31	φ35	90	1.85/1.86	0.92/0.92	0.35/0.35	0.34/0.34	13.5	22
UQT-050	500	26/31	φ35	90	3.60/3.62	1.55/1.58	0.59/0.59	0.58/0.58	13.5	23
UQT-060	600	26/31	φ35	120	3.65/3.62	1.60/2.20	0.60/0.59	0.59/0.58	13.5	23
UQT-080	800	31/37	φ45	180	4.10/4.10	2.15/2.20	0.85/0.85	0.79/0.79	16.5	29
UQT-120	1200	31/37	φ45	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	16.5	29
UQT-150	1500	78/93	φ45	180	4.20/4.10	2.15/2.20	0.85/0.85	0.79/0.79	49.5	83
UQT-200	2000	93/112	φ45	180	4.10/4.10	2.15/2.20	0.85/0.85	0.79/0.79	49.5	83
UQT-300	3000	93/112	φ45	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	49.5	83
UQT-400	4000	155/185	φ45	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	82.5	83
UQT-500	5000	155/185	φ45	180	4.20/4.10	2.35/2.30	0.87/0.87	0.81/0.81	82.5	83


TECHNICAL PARAMETER

Shell	Enclosure: IP67, NEMA4, Exd II CT5	
Power	Standard : 220VAC/1ph Optional : 110VAC/1ph, 380V/ 440V/ 3ph, 50/60HZ, ±10% 24VDC/110VDC/220VDC	
Motor	Asynchronous motor	
Limit switch	2 x Open/ Close, SPDT, 250VAC 10A	
Auxiliary limit switch	2 x Open/ Close, SPDT, 250VAC 10A	
Torque switch	Close/ Open, each 1, SPDT, 250VAC 10A	Except UQT-005, 008, 010
Travel	90° ±10°	0° ~ 270°
Fail safe/ Operating temperature	Internal-placed thermal protection, Open 115°C ±5°C/ Close 97°C ±5°C	
Indicator	Continuous position indicator	
Manual operate	Declutching mechanism, operate by handwheel	
Self-locking device	Self-locking by worm and worm gear	
Mechanical limit	2 x external adjustable stopper	
Space heater	7-10W (110V/220VAC)	
Conduit entry	2 x PF 3/4"	
Ambient temperature	-20°C ~ +70°C	
Lubrication	Grease moly (EP type)	
Material	Steel, Aluminium alloy, Aluminium bronze, Polycarbonate	
Ambient humidity	Max 90% RH	Non-Condensing
Anti-vibration	X Y Z 10g, 0.2~34 Hz, 30 minutes	
External coating	Dry powder, Epoxy polyester, high anti-corrosion	


GENERAL DRAWING



UQT-005 UQT-080

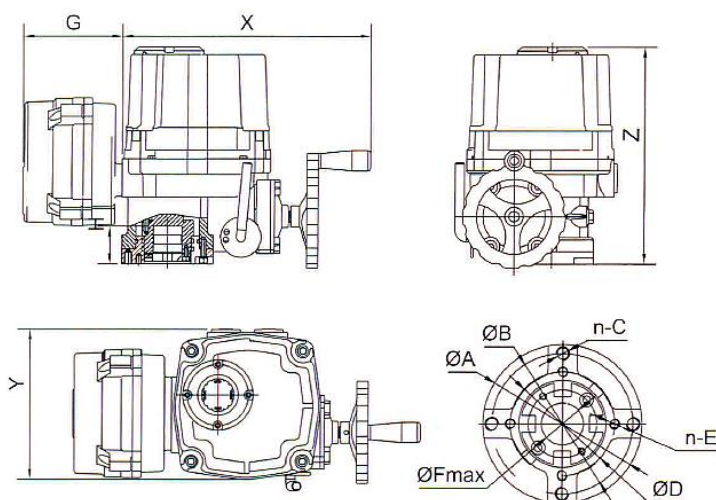

UQT-120 UQT-500

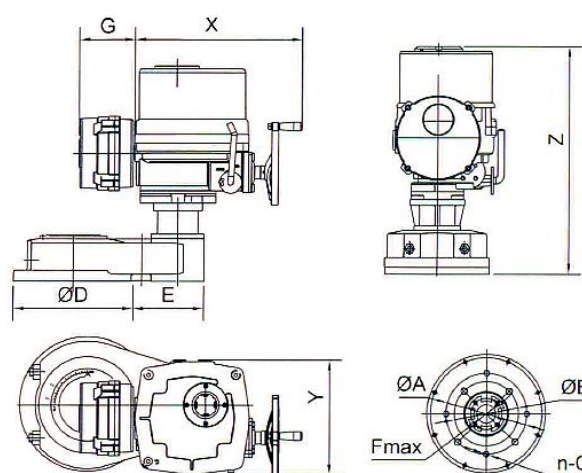

Model	X	Y	Z	A	B	N-C	D	N-E	F	G	H
UQT-005	270	161	233.5	φ90	φ70	4-M8	/	/	φ20	140	40
UQT-008	270	161	233.5	φ90	φ70	4-M8	/	/	φ20	140	40
UQT-010	270	161	233.5	φ90	φ70	4-M8	/	/	φ20	140	40
UQT-015	351	226	270	φ125	φ102	4-M10	φ70	4-M8	φ22	140	45
UQT-020	351	226	270	φ125	φ102	4-M10	φ70	4-M8	φ22	140	45
UQT-030	358	240	290	φ150	φ125	8-M12	φ102	4-M10	φ35	140	55
UQT-050	358	240	290	φ150	φ125	8-M12	φ102	4-M10	φ35	140	55
UQT-060	410	240	290	φ150	φ125	8-M12	φ102	4-M10	φ35	140	55
UQT-080	410	276	335	φ180	φ140	8-M16	φ125	4-M12	φ45	140	65
UQT-120	410	276	335	φ180	φ140	8-M16	φ125	4-M12	φ45	140	65
UQT-150	410	276	335	φ165	φ140	8-M16	φ285	147	φ45	/	/
UQT-200	410	276	335	φ165	φ140	4-M16-M20	φ285	147	φ45	/	/
UQT-300	410	276	335	φ165	φ140	4-M16-M20	φ285	147	φ45	/	/
UQT-400	410	276	335	φ165	φ140	4-M16-M20	φ285	147	φ45	/	/
UQT-500	410	276	335	φ165	φ140	4-M16-M20	φ285	147	φ45	/	/


OPTION SPECIFICATION

No.	Option Scheme	Remarks
1	Explosion-proof actuator (Exd II CT5)	UQT Series
2	Water-proof actuator (IP68, 10M, 250HR)	UQT Series
3	Potentiometer unit (1K-10K)	UQT Series
4	Proportion control unit (control signal 4-20mA DC/1-5V/1-10V)	UQT Series
5	Local control units (local control open/ stop/ close optional switch, local/ remote switch)	UQT Series
6	Travel 120°, 180°, 270°	UQT Series
7	Direct current motor (24VDC)	UQT Series
8	Torque switch (SPDT x 2 250VAC 10A)	Except UQT-005, 008, 010
9	Electric current position transfer (output 4-20mA DC)	UQT Series
10	Self-reset when power failure	UQT Series
11	High temperature resistance actuator (-10°C ~ +100°C)	UQT Series
12	Low temperature resistance actuator (-40°C ~ +70°C)	UQT Series
13	Low speed actuator	UQT Series

*data is subjected to change without prior notice due to continual improvement.



1. UQT-005~010, 110/220VAC, 50/60HZ, 1PH(on/off function)

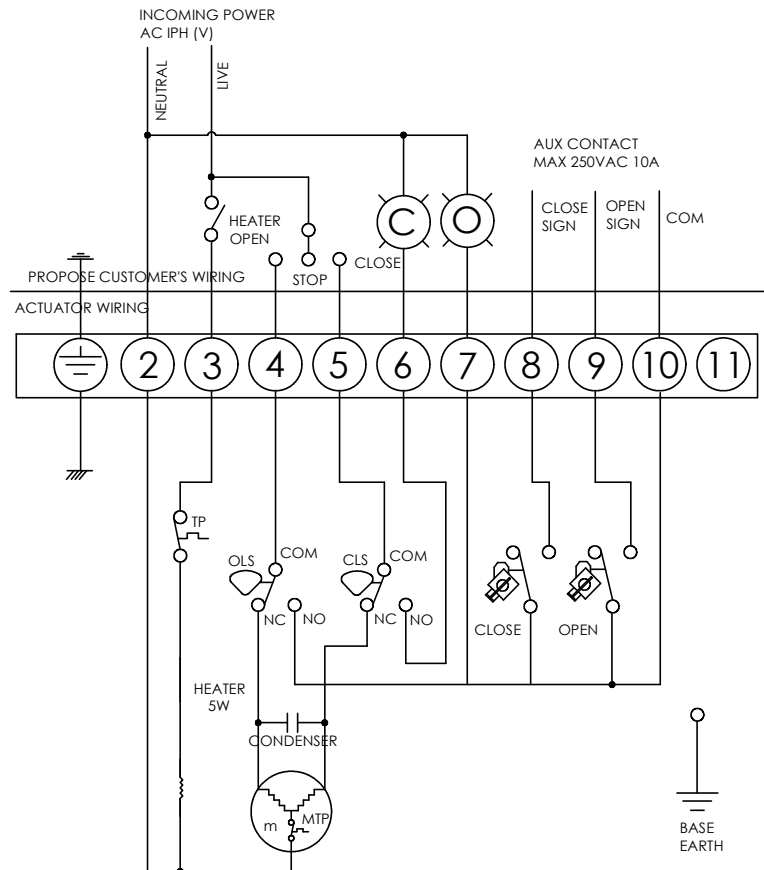

2. UQT-015~500, 110/220VAC, 50/60HZ, 1PH (on/off function)

