




UNIMECH GROUP, MALAYSIA

## SIGHT GLASS FLANGED END JIS 10K with FLAPPER

Model : ARF-808FE(J)-F

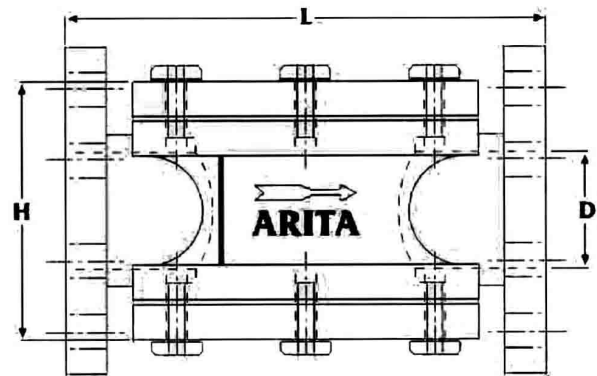

### Technical Data

#### Features :

- Flanged End : JIS B2210
- 120°C Non-shock water : 1.37 Mpa (14 kgf/cm<sup>2</sup>)
- 120°C Water,Oil,Gas : 0.98 Mpa (10 kgf/cm<sup>2</sup>)
- Saturated Steam : 0.69 Mpa (7 kgf/cm<sup>2</sup>)
- Hydrostatic Shell Test : 2.06 Mpa (21 kgf/cm<sup>2</sup>)
- Hydrostatic Seat Test : 1.51 Mpa (15.4 kgf/cm<sup>2</sup>)

#### Material

| No | PART    | MATERIAL       |
|----|---------|----------------|
| 1  | BODY    | CAST IRON      |
| 2  | CAP     | CAST IRON      |
| 3  | GLASS   | TEMPERED GLASS |
| 4  | FLAPPER | SS 304         |
| 5  | GASKET  | ASBESTOS-FREE  |

#### Dimension in mm

| SIZES | L   | H   | WT. (KG) |
|-------|-----|-----|----------|
| 50    | 221 | 117 | 9.2      |
| 65    | 271 | 140 | 18.0     |
| 80    | 271 | 160 | 19.2     |
| 100   | 316 | 190 | 30       |

The contents of this literature are for informative purposes only. Unimech is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Unimech or its distributors. Unimech reserves the right to change or modify product design without prior notice.

Our Ref. : AR/SGG- 08/21