




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

REMOVABLE ELEMENT WOLTMAN COLD WATER METER FLANGED END PN16

Model : LXLG-50 ~ 200B

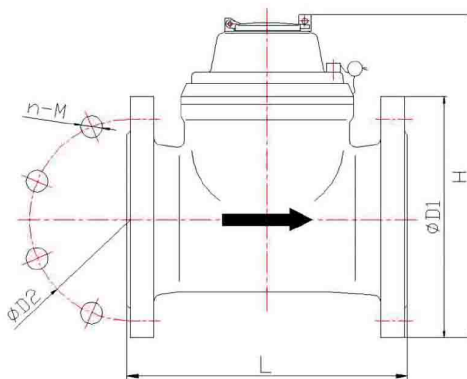

Product Features :

- Measuring the volume of cold water passing through the pipeline.
- Dry-dial, Magnetic drive.
- Cast Iron body.

Specification

Technical Data	ISO 4064
Water Temperature	0~ ≤50°C
Connection	Flanged End PN16

Dimensions (mm)

Size	L	H	Connecting Flange		
			ØD1 Outside diameter	ØD2 Bolt circle diameter	Connection Bolt (n-M)
50	200	214	165	125	4-M16
65	200	224	185	145	4-M16
80	225	279	200	160	8-M16
100	250	289	220	180	8-M16
150	300	319	285	240	8-M20
200	350	346	340	295	8-M20

Technical Data

Size (mm)	Q4 Overload Flow	Q3 Permanent Flow	Q2 Transitional Flow	Q1 Min Flow	Min. Reading	Max. Reading
	m ³ /h				m ³	
50	31.25	25	0.8	0.5	0.0005	999,999
65	50	25	1.28	0.8	0.0005	999,999
80	78.75	40	2	1.26	0.002	999,999
100	125	63	3.2	2	0.002	999,999
150	312.5	100	8	5	0.002	999,999
200	500	250	12.8	8	0.002	999,999

Maximum Permissible Error : From minimum flow rate (Q1) inclusive to transitional flow-rate (Q2) exclusive ±5%
From transitional flow-rate (Q2) to overload flow-rate (Q4) ±2%

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : NBLX2- 10/21