


LUG TYPE BUTTERFLY VALVE DIN FLANGED

Model : ARV-812LT(D)

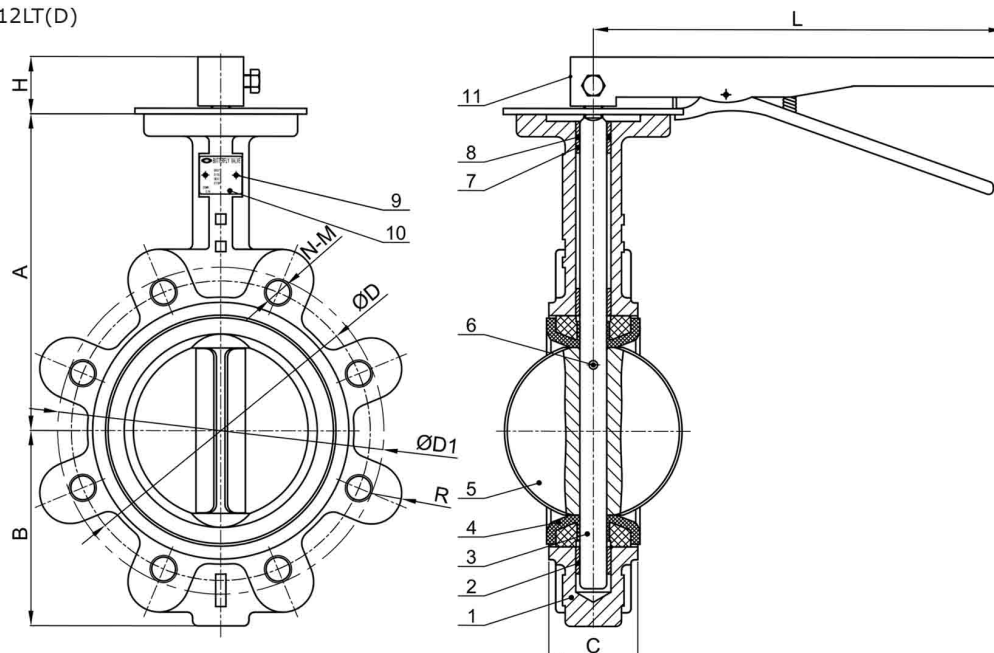

Design Standard

Design Standard	EN 593
Face to Face	EN 558
Flange Connection	EN1092 PN 16
Test Standard	EN 12266-1

Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SHAFT	SS 420
3	BUSHING (LONG)	PTFE
4	SEAT	EPDM
5	DISC	CF8
6	PIN	SS 316
7	BUSHING (SHORT)	PTFE
8	O-RING	EPDM
9	RIVET	ALUMINIUM
10	NAME PLATE	ALUMINIUM
11	HAND LEVER	DI

Hydrostatic Test

Pressure Rating	PN10 / PN16
Shell Test Pressure	1.5 / 2.4 Mpa
Seal Test Pressure	1.1 / 1.76 Mpa
Suitable Temperature	-20 to 130 °C (EPDM)


Dimension in mm

SIZES	DN	A	B	C	ØD	N-M	ØD1	R	H	L
2"	50	156	80	42.04	Ø125	4-M16	Ø125	15	24	240
2.1/2"	65	162	89	45.68	Ø145	4-M16	Ø145	17	24	240
3"	80	170	95	45.21	Ø160	8-M16	Ø160	15	24	240
4"	100	185	114	52.07	Ø180	8-M16	Ø190.5	18	28	260
5"	125	207	127	55.36	Ø210	8-M16	Ø215.9	22	32	267
6"	150	216	139	55.75	Ø240	8-M20	Ø241.3	22	32	267
8"	200	256	175	60.58	Ø295	12-M20	Ø298.4	25	34	355
10"	250	248	203	67.63	Ø355	12-M24	Ø361.9	25	34	355
12"	300	280	242	76.9	Ø410	12-M24	Ø431.8	23	34	355

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

LUG TYPE BUTTERFLY VALVE DIN FLANGED

Model : ARV-812LT(D)

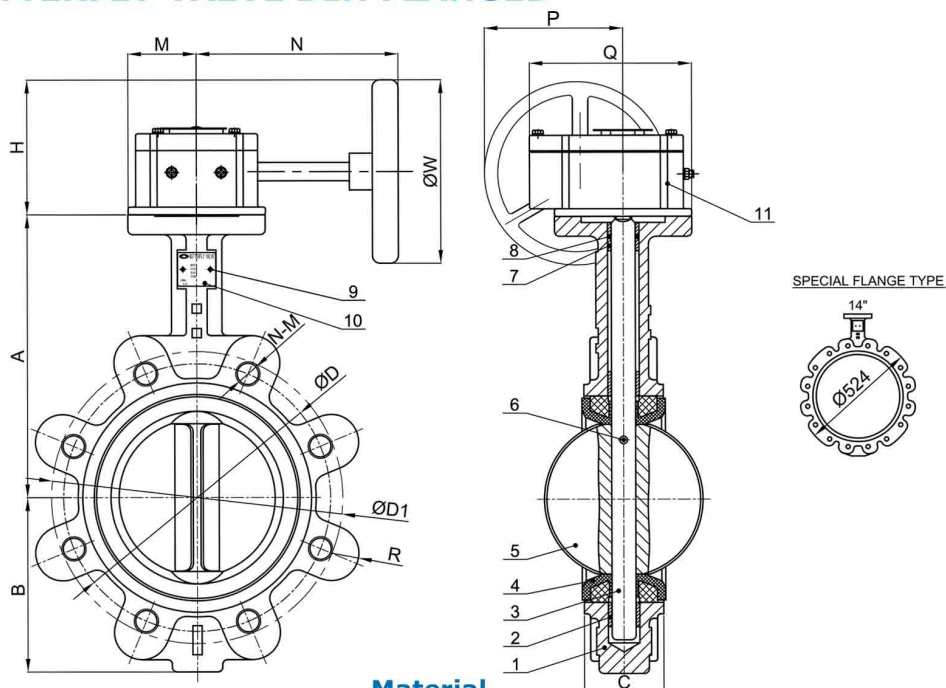

Design Standard

Design Standard	EN 593
Face to Face	EN 558
Flange Connection	EN1092 PN 16
Test Standard	EN 12266-1

Material

No	PART	MATERIAL
1	BODY	CAST IRON
2	SHAFT	SS 420
3	BUSHING (LONG)	PTFE
4	SEAT	EPDM
5	DISC	CF8
6	PIN	SS 316
7	BUSHING (SHORT)	PTFE
8	O-RING	EPDM
9	RIVET	ALUMINIUM
10	NAME PLATE	ALUMINIUM
11	GEAR BOX	

Hydrostatic Test

Pressure Rating	PN10 / PN16
Shell Test Pressure	1.5 / 2.4 Mpa
Seal Test Pressure	1.1 / 1.76 Mpa
Suitable Temperature	-20 to 130 °C (EPDM)

Dimension in mm

SIZES	DN	A	B	C	ØD	N-M	ØD1	R	H	ØW	M	N	P	Q
2"	50	156	80	42.04	Ø125	4-M16	Ø125	15	90	Ø120	45	155	100	108
2.1/2"	65	162	89	45.68	Ø145	4-M16	Ø145	17	90	Ø120	45	155	100	108
3"	80	170	95	45.21	Ø160	8-M16	Ø160	15	90	Ø120	45	155	100	108
4"	100	185	114	52.07	Ø180	8-M16	Ø190.5	18	90	Ø120	45	155	100	108
5"	125	207	127	55.36	Ø210	8-M16	Ø215.9	22	90	Ø120	45	155	100	108
6"	150	216	139	55.75	Ø240	8-M20	Ø241.3	22	90	Ø120	45	155	100	108
8"	200	256	175	60.58	Ø295	12-M20	Ø295	25	138	Ø200	63	190	157	144
10"	250	248	203	67.63	Ø355	12-M24	Ø361.9	25	138	Ø200	63	190	157	144
12"	300	280	242	76.9	Ø410	12-M24	Ø431.8	23	138	Ø200	63	190	157	144
14"	350	368	267	78	Ø470	16-M24	Ø470	27	195	Ø300	70	210	230	180

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.