




UNIMECH GROUP, MALAYSIA

PARALLEL SLIDE BLOW DOWN VALVE FLANGED END (undrilled)

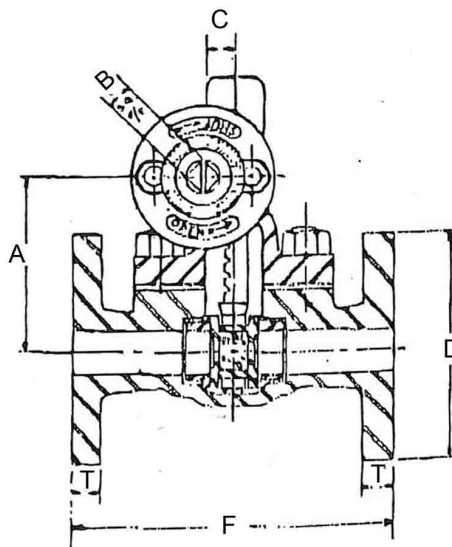

Technical Data

Features :

Cast carbon steel (ASTM A 216 Gr WCB)
Parallel slide blow down valve.
Rack & pinion operated with renewable Monel seats.
Flanged ends undrilled.
Suitable for maximum BOP : 350 Psig
Supplied with MS operating key.
Max. recommended temperature : 400 °C

Body & seat tested to = 700 Psig Hyd.

Material

No	PART	MATERIAL
1	BODY & BONNET	CAST CARBON STEEL
2	STUFFING BOX, GLAND, RACK & PINION	IBR BRONZE GRADE B
3	BODY SEAT RINGS & VALVE DISCS	CAST MONEL
4	SPRING	SPRING STEEL
5	GASKETS	COMPRESSED ASBESTOS FIBER
6	GLAND PACKING	GRAPHITED ASBESTOS
7	OPERATING KEY	MILD STEEL
8	FASTENER	MILD STEEL

Dimension in mm

DN	F	A	B	C	D	T
25	178	138	16	18	4.3/4"	3/4"
32	242	145	16	19	5.1/4"	3/4"
40	267	171	16	20.5	5.1/2"	7/8"
50	305	187	22	25.4	6.1/2"	1"
65	330	208	22	28.5	7.1/4"	1"

The contents of this literature are for informative purposes only. Unimech is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Unimech or its distributors. Unimech reserves the right to change or modify product design without prior notice.

Our Ref. : SBDV- 09/21