




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

STEAM SEPARATOR FLANGED END PN 16

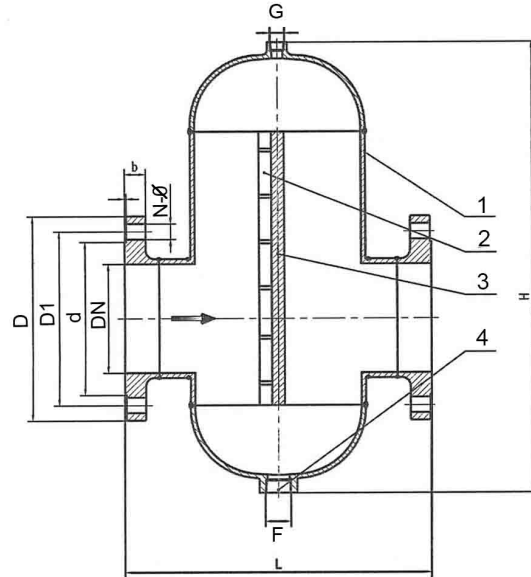

Specification:

Nominal Pressure	PN 16
PMA - Maximun allowable pressure	24 bar g
TMA - Maximun allowable temperature	300 °C
Pipe Connection	PN 16

Material

No	PART	MATERIAL
1	BODY	WCB
2	DRAIN TABLE-FLAP	Q235
3	WATER-STOP SHEEL	Q235
4	DRAIN JOINT	WCB

Dimension in mm

Size	DN	L	H	D	D1	d	F	G	N - Ø	Volume (litre)
1"	25	210	230	115	85	65	1"	1/2"	4-Ø14	2.6
1.1/4"	32	350	580	135	100	78	1"	1/2"	4-Ø18	4.6
1.1/2"	40	350	580	145	110	85	1"	1/2"	4-Ø18	7.9
2"	50	350	580	160	125	100	1"	1/2"	4-Ø18	8.7
2.1/2"	65	400	620	180	145	120	1"	3/4"	8-Ø18	18
3"	80	400	620	195	160	135	1"	3/4"	8-Ø18	32
4"	100	400	620	230	190	160	2"	3/4"	8-Ø23	51
5"	125	450	670	270	220	188	2"	3/4"	8-Ø25	67
6"	150	450	670	300	250	218	2"	3/4"	8-Ø25	96
8"	200	500	670	375	320	282	2"	3/4"	12-Ø30	195

The contents of this literature are for informative purposes only. Unimech is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Unimech or its distributors. Unimech reserves the right to change or modify product design without prior notice.