




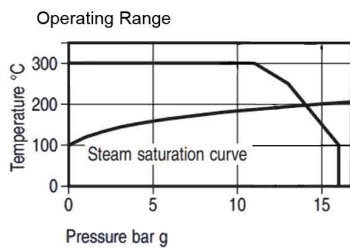

UNIMECH GROUP, MALAYSIA

## STEAM SEPARATOR FLANGED END PN 16

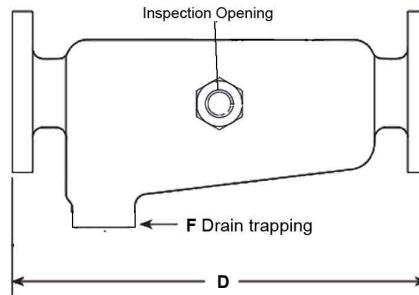

### Specification:

<b>Nominal Pressure</b>	<b>PN 16</b>
<b>PMA - Maximun allowable pressure</b>	24 bar g
<b>TMA - Maximun allowable temperature</b>	300 °C
<b>Pipe Connection</b>	PN 16

### Material

No	PART	MATERIAL
1	BODY	WCB
2	PLUG	CARBON STEEL
3	GASKET	REINFORCED EXFOLIATED GRAPHITE

### Dimension in mm

Size	DN	A	B	C	D	E	F	Volume (litre)
3"	80	190	270	150	480	1"	1.1/2"	6.5
4"	100	200	290	180	530	1"	1.1/2"	13.5
5"	125	215	330	200	585	1"	1.1/2"	38.5
6"	150	235	360	250	635	1"	1.1/2"	42.5
8"	200	295	460	340	710	1.1/2"	1.1/2"	68.0

The contents of this literature are for informative purposes only. Unimech is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Unimech or its distributors. Unimech reserves the right to change or modify product design without prior notice.