


STAINLESS STEEL FLANGE

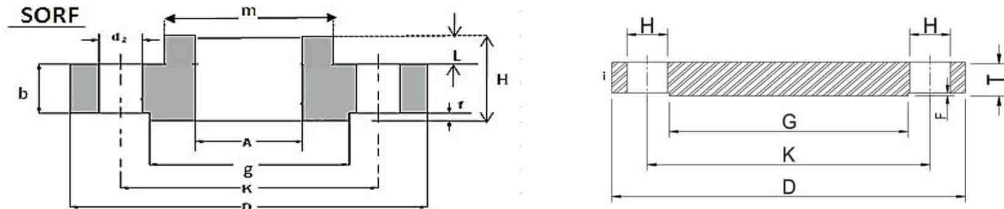

ANSI 150LBS SORF

SIZE		O.D	I.D	Thickness		Slip On		Raised Face		PCD	Bolt.D	Bolt No.	Weight
DN	INCH	(mm)	(mm)	FULL	FLANGE	Thk	OD	Thk	OD	(mm)	(mm)		Kg/Pcs
(mm)	(")	D	A	H	b	L	m	f	g	K	d2		
15	½"	89.0	22.3	15.9	9.5	4.8	30.2	1.6	35.0	60.3	15.8	4	0.40
20	¾"	98.5	27.6	15.9	11.2	3.1	38.2	1.6	42.9	69.8	15.8	4	0.57
25	1"	108.0	34.5	17.5	12.7	3.2	49.2	1.6	50.9	79.3	15.8	4	0.78
32	1¼"	117.5	43.1	20.7	14.3	4.8	58.8	1.6	63.6	88.9	15.8	4	1.05
40	1½"	127.1	49.5	22.3	15.9	4.8	65.1	1.6	73.1	98.4	15.8	4	1.33
50	2"	152.5	61.9	25.5	17.5	6.4	77.8	1.6	92.0	120.6	19.0	4	2.06
65	2½"	177.9	74.6	28.6	20.7	6.3	90.5	1.6	104.8	139.7	19.0	4	3.31
80	3"	190.6	90.6	30.2	22.2	6.4	108.0	1.6	127.1	152.4	19.0	4	3.90
100	4"	228.7	116.0	33.4	22.2	9.6	135.0	1.6	157.2	190.5	19.0	8	5.35
125	5"	254.1	143.7	36.5	22.2	12.7	163.5	1.6	185.8	215.9	22.2	8	6.10
150	6"	279.5	170.6	39.7	23.9	14.2	192.1	1.6	216.0	241.3	22.2	8	7.50
200	8"	343.0	221.4	44.5	27.0	15.9	246.1	1.6	269.9	298.4	22.2	8	12.17
250	10"	406.5	276.3	49.2	28.6	19.0	304.9	1.6	323.9	361.9	25.4	12	16.61
300	12"	482.7	327.1	55.6	30.2	23.8	365.2	1.6	381.1	431.8	25.4	12	26.33
350	14"	533.5	359.1	57.2	33.4	22.2	400.1	1.6	412.8	476.2	28.5	12	34.78
400	16"	597.0	410.4	63.6	34.9	27.1	457.3	1.6	470.0	539.7	28.5	16	45.10
450	18"	635.1	461.7	68.3	38.1	28.6	504.9	1.6	533.5	577.8	31.7	16	49.15
500	20"	698.6	513.0	73.1	41.3	30.2	558.9	1.6	584.3	635.0	31.7	20	62.29

ANSI 150LBS RF BLIND

SIZE		O.D	I.D	Thickness		Raised Face		PCD	Bolt.D	Bolt No.	Weight
DN	INCH	(mm)	(mm)	FULL	FLANGE	Thk	OD	(mm)	(mm)		Kg/Pcs
(mm)	(")	D		T	i	F	G	K	H		
15	½"	89.0		11.1	9.5	1.6	35.0	60.3	15.8	4	0.43
20	¾"	98.5		12.8	11.2	1.6	42.9	69.8	15.8	4	0.62
25	1"	108.0		14.3	12.7	1.6	50.9	79.3	15.8	4	0.87
32	1¼"	117.5		15.9	14.3	1.6	63.6	88.9	15.8	4	1.07
40	1½"	127.1		17.5	15.9	1.6	73.1	98.4	15.8	4	1.55
50	2"	152.5		19.1	17.5	1.6	92.0	120.6	19.0	4	2.43
65	2½"	177.9		22.3	20.7	1.6	104.8	139.7	19.0	4	3.99
80	3"	190.6		23.8	22.2	1.6	127.1	152.4	19.0	4	4.95
100	4"	228.7		23.8	22.2	1.6	157.2	190.5	19.0	8	7.10
125	5"	254.1		23.8	22.2	1.6	185.8	215.9	22.2	8	8.73
150	6"	279.5		25.5	23.9	1.6	216.0	241.3	22.2	8	11.38
200	8"	343.0		28.6	27.0	1.6	269.9	298.4	22.2	8	19.77
250	10"	406.5		30.2	28.6	1.6	323.9	361.9	25.4	12	28.94
300	12"	482.7		31.8	30.2	1.6	381.1	431.8	25.4	12	43.72
350	14"	533.5		35.0	33.4	1.6	412.8	476.2	28.5	12	58.43
400	16"	597.0		36.5	34.9	1.6	470.0	539.7	28.5	16	76.61
450	18"	635.1		39.7	38.1	1.6	533.5	577.8	31.7	16	94.20
500	20"	698.6		42.9	41.3	1.6	584.3	635.0	31.7	20	122.89

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.