




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

STAINLESS STEEL FLANGE

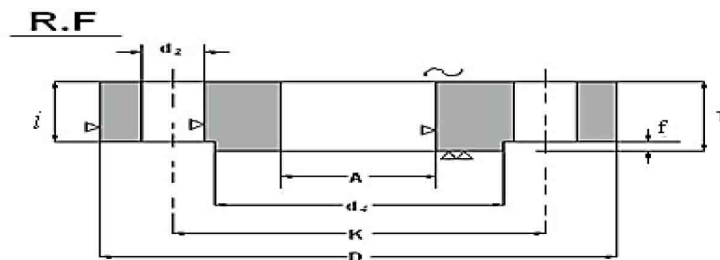

DIN 2501 PN40 RF

SIZE		O.D	I.D	Thickness		Raised Face		K	Bolt.D	Bolt	Weight	Weight
		(mm)	(mm)	FULL	FLANGE	Thk	OD	(mm)	(mm)	No.	Kg/Pc	Kg/Pc
		D	A	T	i	f	d4	K	d2		RF	RF Blind
15	½"	95.0	22.3	16	14	2	45	65	14	4	0.69	0.74
20	¾"	105.0	27.7	18	16	2	58	75	14	4	0.97	1.06
25	1"	115.0	34.5	18	16	2	68	85	14	4	1.16	1.29
32	1¼"	140.0	43.2	18	16	2	78	100	18	4	1.68	1.89
40	1½"	150.0	49.5	18	15	3	88	110	18	4	1.84	2.12
50	2"	165.0	62.0	20	17	3	102	125	18	4	2.45	2.93
65	2½"	185.0	74.7	22	19	3	122	145	18	8	3.24	4.00
80	3"	200.0	90.7	24	21	3	138	160	18	8	4.00	5.22
100	4"	235.0	116.1	24	21	3	162	190	22	8	5.17	7.17
125	5"	270.0	143.8	26	23	3	188	220	26	8	6.95	10.28
150	6"	300.0	170.7	28	25	3	218	250	26	8	8.94	14.00
200	8"	375.0	221.5	34	31	3	285	320	30	12	16.12	26.46
250	10"	450.0	276.3	38	35	3	345	385	33	12	25.33	43.32
300	12"	515.0	327.1	42	38	4	410	450	33	16	34.69	62.55
350	14"	580.0	359.1	46	42	4	465	510	36	16	50.78	87.56
400	16"	660.0	410.5	50	46	4	535	585	39	16	72.15	124.39

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.