




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

NEEDLE VALVE SCREWED END

Model : ARV-118SE

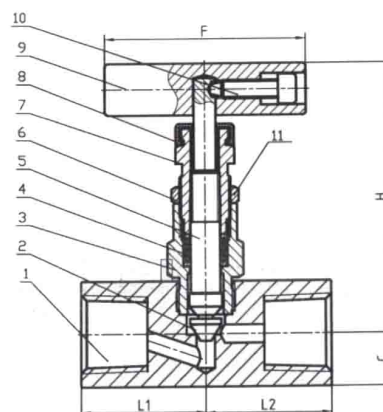

Technical Data

Specifications :

T-bar Handle

Teflon Packing


Roll-formed Stem Thread

Working Pressure : 6,000 psig (414 bar)

Working Temperature : -54 ~ 232 °C

Screwed End

Pressure vs. Temperature

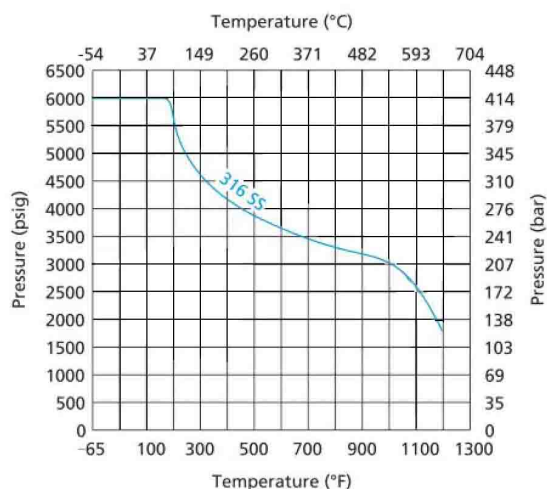

Material

No	PART	MATERIAL
1	BODY	316
2	STEM TIP	316
3	BONNET	316
4	PACKING	PTFE
5	STEM	316
6	LOCK NUT	316
7	PACKING BOLT	316
8	DUST CAP	PLASTIC
9	HANDLE	304
10	SET SCREW	STAINLESS STEEL

Dimension in mm

DN	L1	L2	H	F	C
6	30.5	30.5	73.5	55	12.7
10	30.5	30.5	73.5	55	12.7
15	34	34	73.5	55	14.25
20	38	38	78.9	55	19.05
25	42.5	42.5	78.9	55	22.2

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : KSN240- 01/26