



PN 40 Y-TYPE STRAINER (BSPT)

ARF-105SE

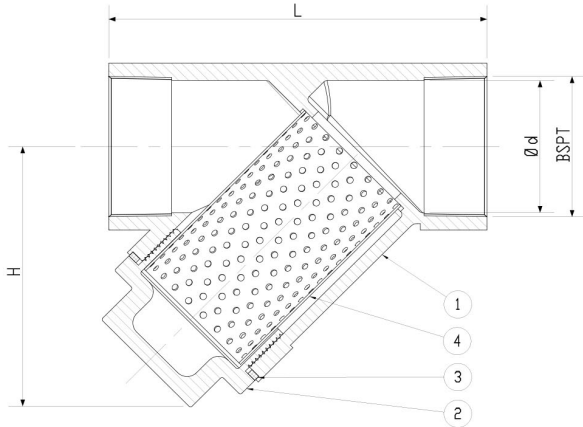

Screen Dimension



Screen Thickness : Ts



SPECIFICATIONS

- Stainless steel body and bonnet
- Screwed end (BSPT)
- Applicable temperature : -20 ~ 120 ° C (Opt. -20 ~ 180 ° C for RPTFE gasket)
- Applicable media : W.O.G. and steam

STANDARD COMPONENT MATERIAL

NO	DESCRIPTION	QTY.	MATERIAL
1	Body	1	CF8M
2	Bonnet	1	CF8M
3	Gasket	1	PTFE (Opt. RPTFE)
4	Screen	1	Stainless Steel

TEST PRESSURE

Nominal Pressure	:	40 kgf/cm ²
Shell Test Pressure	:	60 kgf/cm ²

DIMENSION TABLE (MM)

DN	L	d	BSPT	H	P	ds	Ts	Weight (Kg)
15	60	18	1/2	40	2.7	1	0.5	0.20
20	70	23.2	3/4	43	2.7	1	0.5	0.30
25	86	29.2	1	50	2.7	1	0.5	0.46
32	103	37.9	1-1/4	65	2.7	1	0.5	0.76
40	112	44	1-1/2	69	2.7	1	0.5	1.00
50	140	55.6	2	88	2.7	1	0.5	1.72