




UNIMECH GROUP, MALAYSIA

CARBON STEEL FLANGE

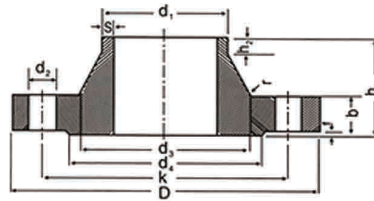

WELDING NECK

DIMENSIONS OF PN16 FLANGES DIN 2633 Welding Neck Flange

BORE		DIMENSION			HUB				RAISED FACE		DRILLING	
DN	D	b Welding neck	k	h ₁	d ₃	s	r	h ₂	d ₄	f	Number of Bolt	d ₂
15	95	14	65	35	30 32	2	4	6	45	2	4	14
20	105	16	75	38	38 40	2.3	4	6	58	2	4	14
25	115	16	85	38	42 45	2.6	4	6	68	2	4	14
32	140	16	100	40	52 56	2.6	6	6	78	2	4	18
40	150	16	110	42	60 64	2.6	6	7	88	3	4	18
50	165	18	125	45	72 75	2.9	6	8	102	3	4	18
65	185	18	145	45	90	2.9	6	10	122	3	4	18
80	200	20	160	50	105	3.2	8	10	138	3	8	18
100	220	20	180	52	125 131	3.6	8	12	158	3	8	18
125	250	22	210	55	150 156	4	8	12	188	3	8	18
150	285	22	240	55	175 184	4.5	10	12	212	3	8	22
175	315	24	270	60	210	5.4	10	12	242	3	8	22
200	340	24	295	62	235	5.9	10	16	268	3	12	22
250	405	26	355	70	285 292	6.3	12	16	320	3	12	26
300	460	28	410	78	344	7.1	12	16	378	4	12	26

The contents of this literature are for informative purposes only. Unimech is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Unimech or its distributors. Unimech reserves the right to change or modify product design without prior notice.

Our Ref. : FLC016- 10/21