

BUTTERFLY VALVE - DOUBLE ACTING

ROTARY ACTUATOR

● APPLICATION

Water distribution pipes
Industrial cleaning machines
Sterilizers
Boilers
Air ventiation system
Medical Equipment
Vacuum packing

**● SPECIFICATION****Actuator**

Type : Double Acting
Model : AD40 ~ AD160
Air Pressure : 4 ~ 7 kg / cm²
Rotating Angle : 90° ± 3°
Temperature : -10 ~ 60 °c



Butterfly Valve

Valve Size : DN40 ~ DN400
Pressure : PN 10 / PN 16
Temperature : -10 ~ 120 °c
Material : Cast Iron Body, EPDM seat
SUS304 Disc
Connection : Universal Flange
Medium : Water, Gas, Air, Oil etc

● DIMENSION

All dimension in mm unless stated otherwise.

Model	Actuator Model	Valve Size		L1	L2	L3	L4	H1	H
		inch	mm						
AD050-040BF	AD50	1.5"	40	178	105	41	66	70	300
AD050-050BF		2"	50	178	105	41	66	82	335
AD050-065BF		2.5"	65	178	125	41	66	90	360
AD050-080BF		3"	80	178	130	41	66	95	370
AD065-100BF	AD65	4"	100	232	156	46	92	114	425
AD065-125BF		5"	125	232	190	46	92	127	450
AD080-150BF	AD80	6"	150	280	212	52	92	139	495
AD100-200BF	AD100	8"	200	330	270	65	126	175	595
AD100-250BF		10"	250	330	325	65	126	205	655
AD125-300BF	AD125	12"	300	420	403	75	140	242	755
AD140-350BF	AD140	14"	350	465	436	80	140	267	820
AD160-400BF	AD160	16"	400	560	488	90	197	309	900

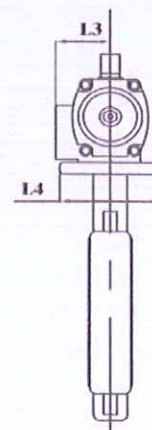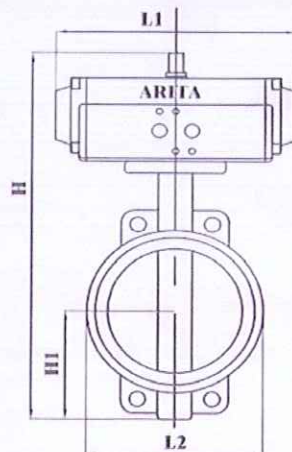

// UIC